


Product Dimension and Drawing

SCH 80 and SCH 40 CPVC Pipe

SCH 80 CPVC Pipe

| Size | Standard | | | |
|--------|----------|-----------|--------|-----------|
| | D | Tolerance | t(min) | Tolerance |
| 1/2" | 21.34 | ±0.10 | 3.73 | +0.51 |
| 3/4" | 26.67 | ±0.10 | 3.91 | +0.51 |
| 1" | 33.40 | ±0.13 | 4.55 | +0.53 |
| 1-1/4" | 42.16 | ±0.13 | 4.85 | +0.58 |
| 1-1/2" | 48.26 | ±0.15 | 5.08 | +0.61 |
| 2" | 60.32 | ±0.15 | 5.54 | +0.66 |
| 2-1/2" | 73.02 | ±0.18 | 7.01 | +0.84 |
| 3" | 88.90 | ±0.20 | 7.62 | +0.91 |
| 4" | 114.30 | ±0.23 | 8.56 | +1.02 |
| 5" | 141.30 | ±0.25 | 9.52 | +1.14 |
| 6" | 168.28 | ±0.28 | 10.97 | +1.32 |
| 8" | 219.08 | ±0.38 | 12.70 | +1.52 |
| 10" | 273.05 | ±0.38 | 15.06 | +1.80 |
| 12" | 323.85 | ±0.38 | 17.45 | +2.08 |
| 14" | 355.60 | ±0.38 | 19.05 | +2.29 |
| 16" | 406.40 | ±0.48 | 21.41 | +2.57 |
| 18" | 457.20 | ±0.48 | 23.80 | +2.84 |
| 20" | 508.00 | ±0.58 | 26.20 | +3.15 |
| 24" | 609.60 | ±0.79 | 30.94 | +3.71 |

(unit :mm)

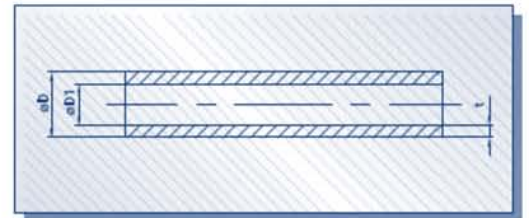

SCH 40 CPVC Pipe

| Size | Standard | | | |
|--------|----------|-----------|--------|-----------|
| | D | Tolerance | t(min) | Tolerance |
| 1/2" | 21.34 | ±0.10 | 2.77 | +0.51 |
| 3/4" | 26.67 | ±0.10 | 2.87 | +0.51 |
| 1" | 33.40 | ±0.13 | 3.38 | +0.51 |
| 1-1/4" | 42.16 | ±0.13 | 3.56 | +0.51 |
| 1-1/2" | 48.26 | ±0.15 | 3.68 | +0.51 |
| 2" | 60.32 | ±0.15 | 3.91 | +0.51 |
| 2-1/2" | 73.02 | ±0.18 | 5.16 | +0.61 |
| 3" | 88.90 | ±0.20 | 5.49 | +0.66 |
| 4" | 114.30 | ±0.23 | 6.02 | +0.71 |
| 5" | 141.30 | ±0.25 | 6.55 | +0.79 |
| 6" | 168.28 | ±0.28 | 7.11 | +0.86 |
| 8" | 219.08 | ±0.38 | 8.18 | +0.99 |
| 10" | 273.05 | ±0.38 | 9.27 | +1.12 |
| 12" | 323.85 | ±0.38 | 10.31 | +1.24 |
| 14" | 355.60 | ±0.38 | 11.10 | +1.35 |
| 16" | 406.40 | ±0.48 | 12.70 | +1.52 |
| 18" | 457.20 | ±0.48 | 14.27 | +1.70 |
| 20" | 508.00 | ±0.58 | 15.06 | +1.80 |
| 24" | 609.60 | ±0.79 | 17.45 | +2.08 |

(unit :mm)

